

Marlbel™

New Bronze



Walnut Plain

Walnut Timber Look


White



White Plain

White Timber Look

SIZE & BLADES:	132cm (52") Dia. from blade tip to blade tip.				
	Five UV resistant, all weather ABS plastic reversible blades.				
	12 Degree blade pitch.				
MOTOR:	Hunter's High Output Outdoor motor. 16 pole. 172 x 20mm 100Watt motor with heavy gauge copper windings, silicon steel laminations, and precision sealed bearings, for quiet operation, year after year.				
CONTROLLER:		Supplied with pull chain for fan, light and reverse operation.			
		<ul style="list-style-type: none"> Suitable with Hunter wall controls. Not suitable for use with remote controls. 			
CANOPY:	Hunter's patented WobbleFree™ canopy with Anti Vibration Technology (AVT) Hunter's patented triangular hanger ball system reduces torque and gives Hunter fans the ability to self-balance, eliminating wobble for rock solid performance, year after year.				
LOCATION:	Indoor & Outdoor use.				
	<ul style="list-style-type: none"> IP44 Rated - Protected from water splashing from all directions. Salt spray tested. 				
MOUNTING:	Easy to install in one of 2 mounting options:				
	<ul style="list-style-type: none"> Standard mounting on flat ceilings. Angled mounting on raked ceilings up to 34-Deg. NB: When used outside, rubber gasket must be used.				
LIGHT KIT:	Suitable for use with most Hunter light kits. NB: If mounting outside, Outdoor Light Kit recommended.				
FEATURES:	Reversing switch for both summer and winter operation.				
	<ul style="list-style-type: none"> Save up to 47% on summer cooling costs, Save up to 24% on winter heating costs. 				
ENERGY STAR:	Energy Star Rated. Proven energy efficient ceiling fan.				
PERFORMANCE: <i>NB: Performance testing carried out in laboratory approved for energy star testing and certification</i>	SPEED	WATTAGE*	RPM	AIRFLOW ** (in M ³ /HR)	EFFICIENCY (in M ³ /HR/W)
	HIGH:	62.3	171	8736	140.20
	MEDIUM:	34.9	130	6774	194.10
	LOW:	15.2	86	4066	267.50
* Wattage for Energy Star data and is based on actual not rated value as shown on rating label					
** Airflow data tested using Energy Star Solid State Method (Developed by Hunter Fan Company)					

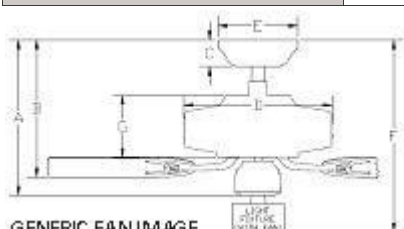

A	B	C	D	E	F	G
STANDARD MOUNT (cm)						
35.31	31.24	9.4	30.99	16.26	N/A	16.00
ANGLED MOUNT (cm) NB: Using 91cm downrod.						
116.59	112.52	9.40	30.99	16.26	N/A	16.00